
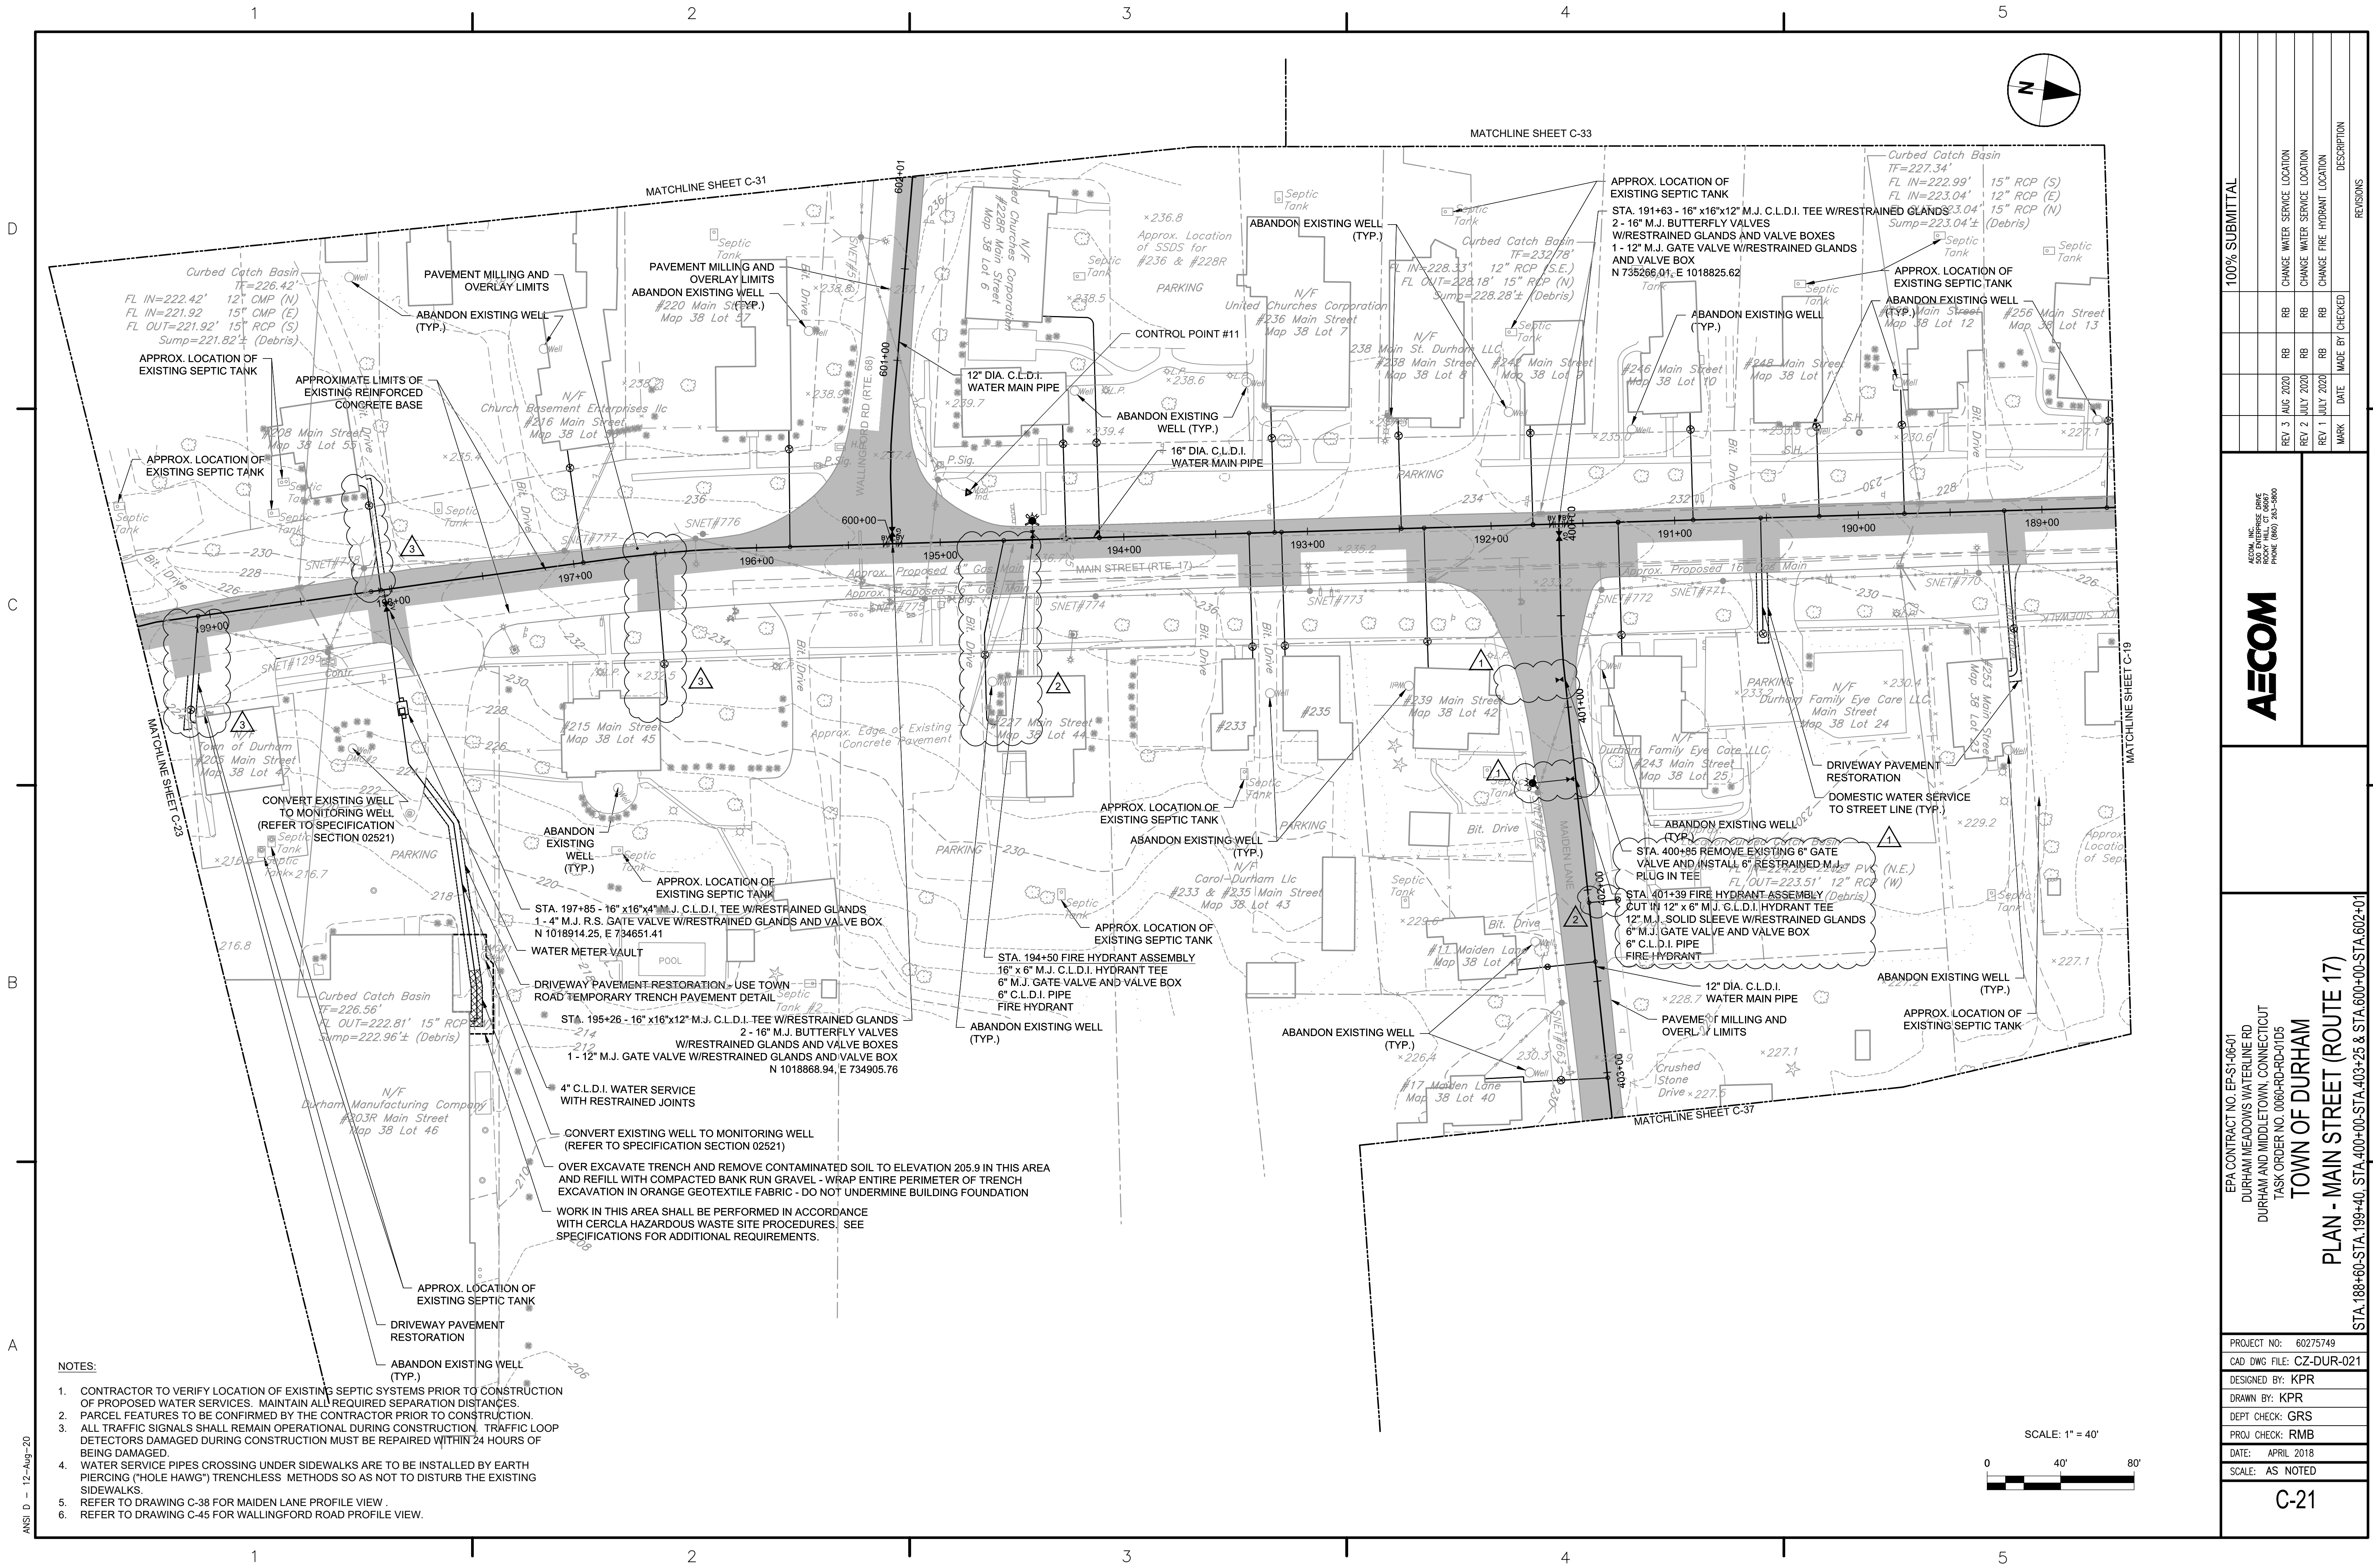


- NOTES:
- CONTRACTOR TO VERIFY LOCATION OF EXISTING SEPTIC SYSTEMS PRIOR TO CONSTRUCTION OF PROPOSED WATER SERVICES. MAINTAIN ALL REQUIRED SEPARATION DISTANCES.
 - PARCEL FEATURES TO BE CONFIRMED BY THE CONTRACTOR PRIOR TO CONSTRUCTION.
 - ALL TRAFFIC SIGNALS SHALL REMAIN OPERATIONAL DURING CONSTRUCTION. TRAFFIC LOOP DETECTORS DAMAGED DURING CONSTRUCTION MUST BE REPAIRED WITHIN 24 HOURS OF BEING DAMAGED.
 - WATER SERVICE PIPES CROSSING UNDER SIDEWALKS ARE TO BE INSTALLED BY EARTH PIERCING ("HOLE HAWG") TRENCHLESS METHODS SO AS NOT TO DISTURB THE EXISTING SIDEWALKS.
 - REFER TO DRAWING C-38 FOR MAIDEN LANE PROFILE VIEW.
 - REFER TO DRAWING C-45 FOR WALLINGFORD ROAD PROFILE VIEW.

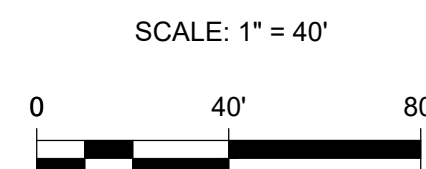

100% SUBMITTAL

REV 3 AUG 2020 RB

REV 2 JULY 2020 RB

REV 1 JULY 2020 RB

MARK

CHANGE WATER SERVICE LOCATION

CHANGE WATER SERVICE LOCATION

CHANGE FIRE HYDRANT LOCATION

DATE

MADE BY

CHECKED

DESCRIPTION

REVISIONS

EPA CONTRACT NO. EP-SI-106-01

DURHAM MEADOWS WATERLINE RD

DURHAM AND MIDDLETOWN, CONNECTICUT

TASK ORDER NO. 006A-RD-RD-01D5

TOWN OF DURHAM

PLAN - MAIN STREET (ROUTE 17)

STA. 188+60-STA. 199+40, STA. 400+00-STA. 403+25 & STA. 600+00-STA. 602+01

AECOM, INC.

200 EAST PARK DRIVE

ROSELAND, MA 01968

PHONE (860) 263-5800

CZ-DUR-021

DESIGNED BY: KPR

DRAWN BY: KPR

DEPT CHECK: GRS

PROJ CHECK: RMB

DATE: APRIL 2018

SCALE: AS NOTED

C-21